

产品概览

自出电缆的无源分线盒

Type code	Number of ports	Channels per port	Number of channels	LEDs
TB-4M12-4-*/TXL	4 x M12	1	4	-
TB-4M12-4P2-*/TXL				yes**
TB-4M12-5-*/TXL		2	8	-
TB-4M12-5P3-*/TXL				yes**
TB-6M12-4-*/TXL	6 x M12	1	6	-
TB-6M12-4P2-*/TXL				yes**
TB-6M12-5-*/TXL		2	12	-
TB-6M12-5P3-*/TXL				yes**
TB-8M12-4-*/TXL	8 x M12	1	8	-
TB-8M12-4P2-*/TXL				yes**
TB-8M12-5-*/TXL		2	16	-
TB-8M12-5P3-*/TXL				yes**

带接插件出口的无源分线盒


Type code	Number of ports	Channels per port	Number of channels	LEDs
TB-4M12-4-CS12T	4 x M12	1	4	-
TB-4M12-4P2-CS12T				yes**
TB-4M12-4-CSM2H		2	8	-
TB-4M12-4P2-CS12H				yes**
TB-4M12-5-CS19T	6 x M12	1	6	-
TB-4M12-5P3-CS19T				yes**
TB-4M12-5-CS19H		2	12	-
TB-4M12-5P3-CS19H				yes**
TB-6M12-4-CS12T	8 x M12	1	8	-
TB-6M12-4P2-CS12T				yes**
TB-6M12-4-CS12H		2	16	-
TB-6M12-4P2-CS12H				yes**
TB-6M12-5-CS19T				-
TB-6M12-5P3-CS19T				yes**
TB-6M12-5-CS19H				-
TB-6M12-5P3-CS19H				yes**
TB-8M12-4-CS12T				-
TB-8M12-4P2-CS12T				yes**
TB-8M12-4-CS12H				-
TB-8M12-4P2-CS12H				yes**
TB-8M12-5-CS19T				-
TB-8M12-5P3-CS19T				yes**
TB-8M12-5-CS19H				-
TB-8M12-5P3-CS19H				yes**

* 标准线缆长度：2米，5米和10米
**LED灯版本：1个电源指示灯，每个通道1个信号指示灯

图尔克对本印刷品及其内容拥有最终解释权，最新产品信息请以我司官方网站资料为准。

TURCK

Industrial
Automation

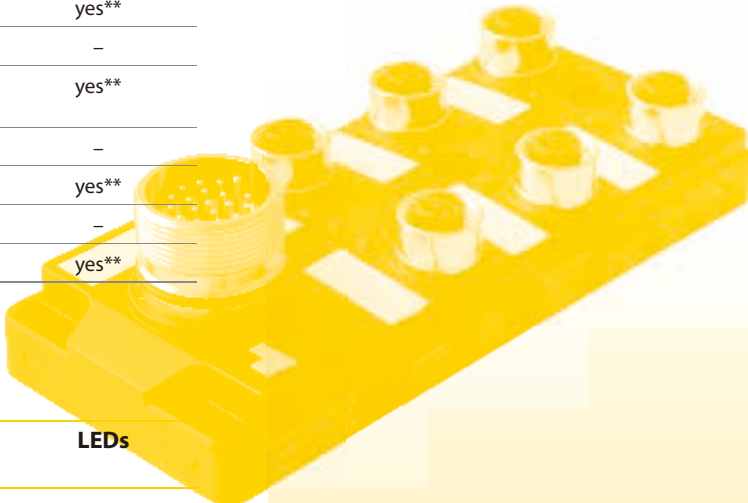

图尔克集团公司

德国
Hans Turck GmbH & Co. KG
Witzlebenstraße 7
D-45472 Mülheim an der Ruhr
P.O. Box D-45466 Mülheim an der Ruhr
Phone: (+49) (2 08) 49 52-0
Fax: (+49) (2 08) 49 52-264
E-Mail: turckmh@mail.turck-globe.de




图尔克(天津)传感器有限公司

天津市西青经济开发区兴华四支路18号
邮编：300381
电话：(+86) (22) 83988188/83988199
传真：(+86) (22) 83988149
邮箱：marketing@turck.com

TURCK


Industrial
Automation

无源分线盒

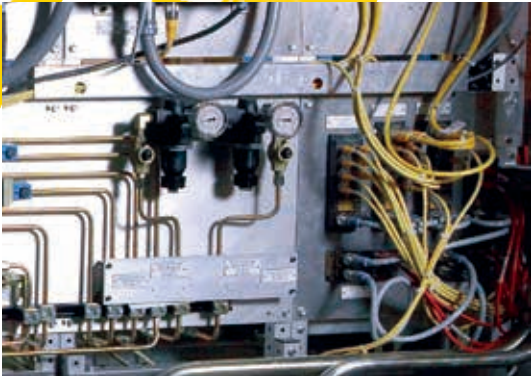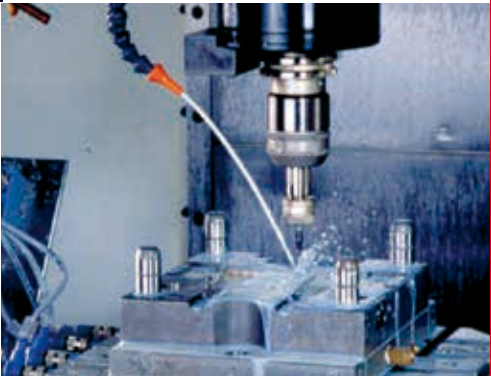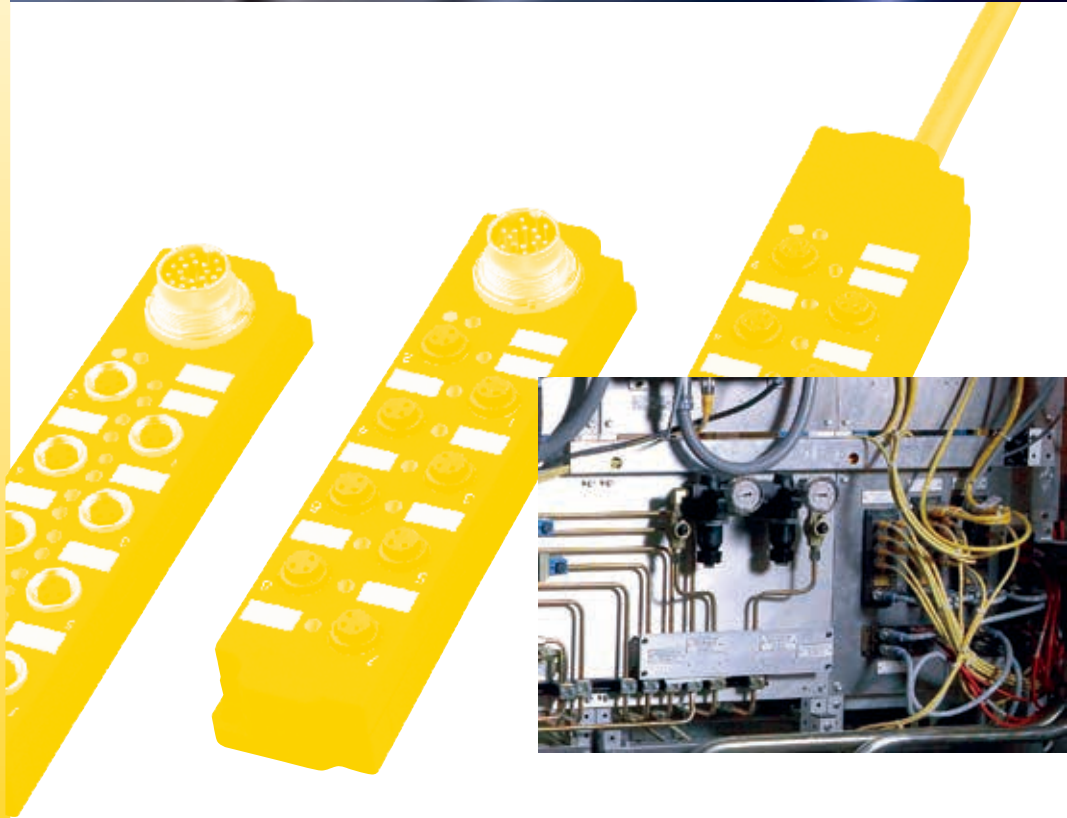

Sense it! Connect it! Bus it! Solve it!

无源分线盒

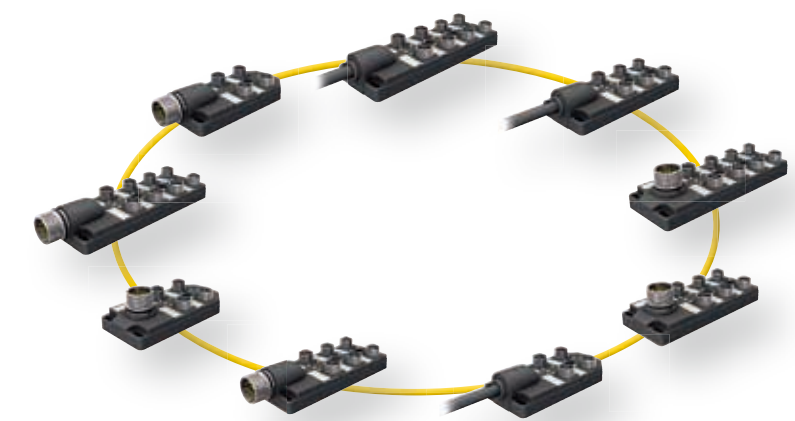

集中采集现场信号的无源分线盒

执行器/传感器无源分线盒采集现场不同装置的信号并将其成束到一根多芯电缆中。分线盒可以被迅速地安装固定，维护时可以确保更短的停工期，在终端与控制柜之间的接线也变得很

明晰。我们提供不同的模块理念，您可以选择直出线的或者是带胜任于拖链场合应用，因为会经常性地牵涉到电缆线的更换。

型谱释义—带接插件引出口的无源分线盒

TB	-	8	M12	?	-	5	P	3	-	CS19	T	/	CS
----	---	---	-----	---	---	---	---	---	---	------	---	---	----

TB	Product series	-	8	M12	?	Ports	-	5	P	3	Assignment	-
TURCK Box						Material threaded bush - brass, nickel-plated V stainless steel (V4A) Connector M12 male M12 x 1 Number of ports 4 4 ports 6 6 ports 8 8 ports					Number of LEDs (if applicable) 2 1 power + 1 signal LED/port 3 1 power + 2 signal LEDs/port LED Type - no LED P PNP LED N NPN LED Channels per port 4 1 signal/port 5 2 signal/port	

CS19	T	Connection	/	S	Options	-
		Connector exit T top exit H side exit Type CS12 12-pin M23 (brass) CSV12 12-pin M23 (stainless steel) CS19 19-pin M23 (brass) CSV19 19-pin M23 (stainless steel) RSF120 12-pin M23 (brass) RSFV120 12-pin M23 (stainless steel) RSF190 19-pin M23 (brass) RSFV190 19-pin M23 (stainless steel) RSF60 6-pin M23 (brass) RSFV60 6-pin M23 (stainless steel)			Options (if applicable) CSxxxxx customer specific	

型谱释义—自出电缆的无源分线盒

TB	-	8	M12	?	-	5	P	3	-	*	-	CSM19	/	S
----	---	---	-----	---	---	---	---	---	---	---	---	-------	---	---

TB	Product series	-	8	M12	?	Ports	-	5	P	3	Assignment	-
TURCK box						Material threaded bush - brass, nickel-plated V stainless steel (V4A) Connector M12 Male M12 x 1 Number of ports 4 4 ports 6 6 ports 8 8 ports					Number of LEDs (if applicable) 2 1 power + 1 signal LED/port 3 1 power + 2 signal LEDs/port LED Type - no LED P PNP LED N NPN LED Channels per port 4 1 signal/port 5 2 signal/port	

*	Cable length	-	CSM19	Connection	/	S	Options	-
	Cable length in meters			Molded homerun connector type (if applicable) CSM12 12-pin M23 (brass) CSMV12 12-pin M23 (stainless steel) CSM19 19-pin M23 (brass) CSMV19 19-pin M23 (stainless steel) RSM120 12-pin M23 (brass) RSV120 12-pin (stainless steel) RSM190 19-pin M23 (brass) RSV190 19-pin (stainless steel)			Options (if applicable) TXL TPU cable /S101 Flexlife-20 cable CSxxxxx customer specific	

用于I/O-Link的“被激活”的无源分线盒

一个用于连接I/O-Link的分线盒是在无源连接和总线技术相关联后进一步发展而来的。这个“被激活”的无源分线盒仅仅需要3根线就可以连接16个传感器

或执行器到控制柜。同时也可以提供诊断功能，能及时了解现场装置连接到I/O-Link主站的供电和短路故障。



Type code	Number of ports	Channels per port	Number of channels
TBIL-M1-16DIP	8 x M12	2	16
TBIL-M1-8DOP	8 x M12	1	8

可提供不同电缆长度和电缆材质的接插件。